

# RM1 Radio Audio Monitor

Intended for voice monitoring and the operation of connected radios.

Makes the work of radio operators easier, helping to ensure that missions are successful.



An effective solution for vehicles that are not equipped with an intercom system. Also applicable for command and control posts, shelters, etc.


- For the crew of tactical vehicles & command posts
- Easy operation & installation
- Minimal training required
- Built-in amplified loudspeaker
- Volume control
- Visual indication of radio activity
- Keying and transmitting radio selectors
- Interface for microphone (handset or headset)
- Emergency call function for simultaneous transmission to all radios
- Software defined parameters



# RM1

## Radio Audio Monitor

### SCALE DRAWING

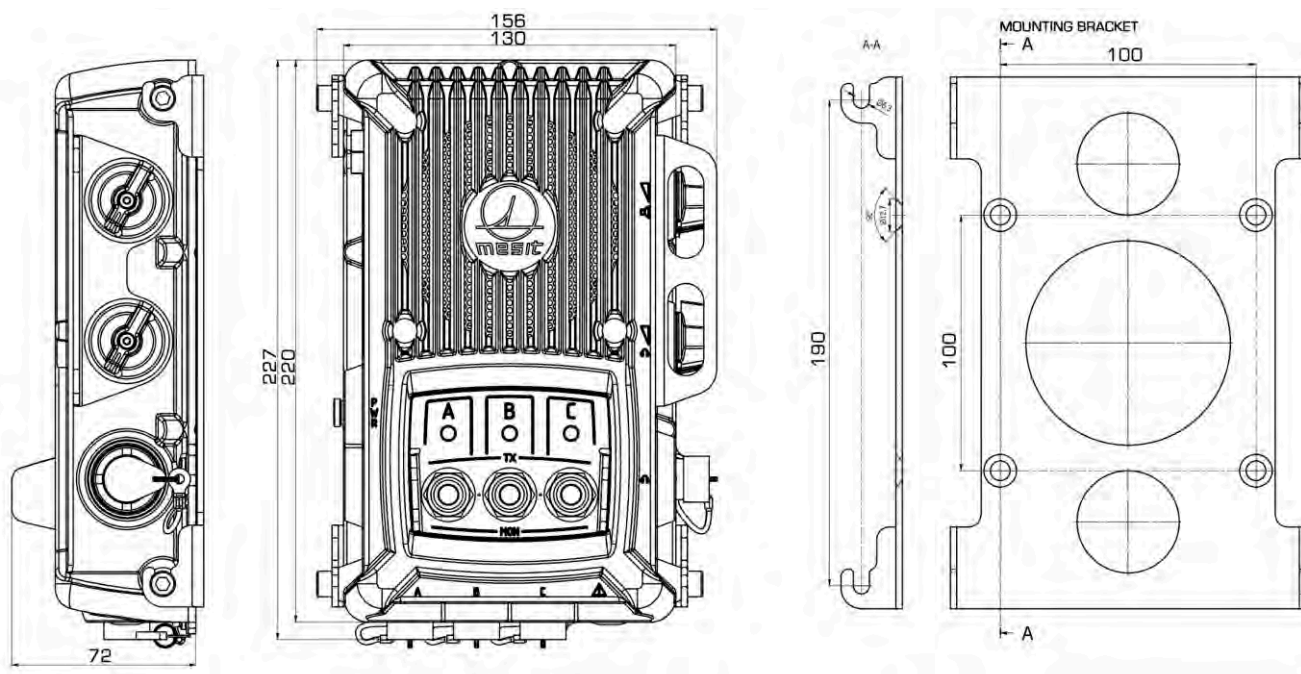

### TECHNICAL PARAMETERS

Nominal supply voltage	11 to 36 V DC (alternatives available on request)
Operating temperature	-40°C to +71°C
Environment	MIL-STD-461G, MIL-STD-810G

Available in various colors



458-07/18/EN



MESIT asd, s.r.o.  
Sokolovská 573, Mařatice  
686 01 Uherské Hradiště  
Czech Republic  
asd@mesit.cz  
T +420 572 522 200

Sales Department  
defence@mesit.cz  
T +420 572 522 603  
F +420 572 522 806  
www.mesit.cz

ID: 60709235  
VAT No: CZ60709235  
Brno Commercial register - C 15427  
All data are subject to change.  
This is not an offer for a contract.

